PYLE®

www.PyleAudio.com

USER MANUAL

PLCMTR26

Weatherproof Dual Camera System

Please read instructions carefully before installation and use. Installation should be performed by a professional installer.

To ensure your safety, the driver should not watch videos or operate features on the monitor while driving. There are no serviceable parts in this unit, do not disassemble or try to repair this unit. If unit malfunctions please return to your vendor or send to a Pyle repair facility. Please observe and obey the local laws and regulations when installing the unit. Upon Installation, please make sure as to not to interfere with any of the vehicle's safety features, wiring, components, etc.

Connection

Connect the camera's threaded locking 4-pin cable connectors into the female receiving connection of the included 4-pin extension cables. The extension cables then connect to your compatible video monitors with 4-pin receiving connectors. The threaded locking cable connectors of the camera serve to provide power and video for both cameras.
(camera 1 - channel 1/ camera 2 - channel 2)

Versatile Mounting Installation

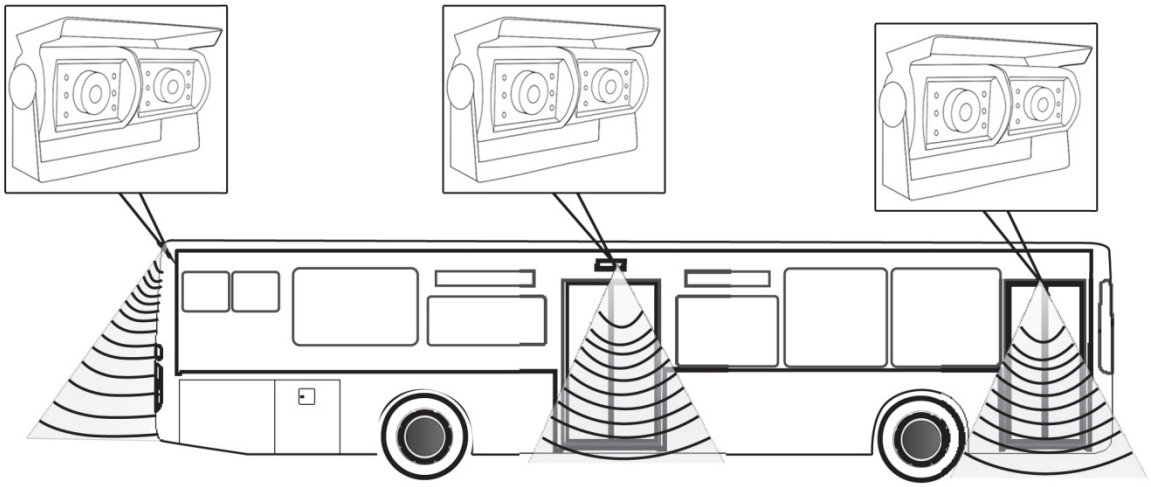

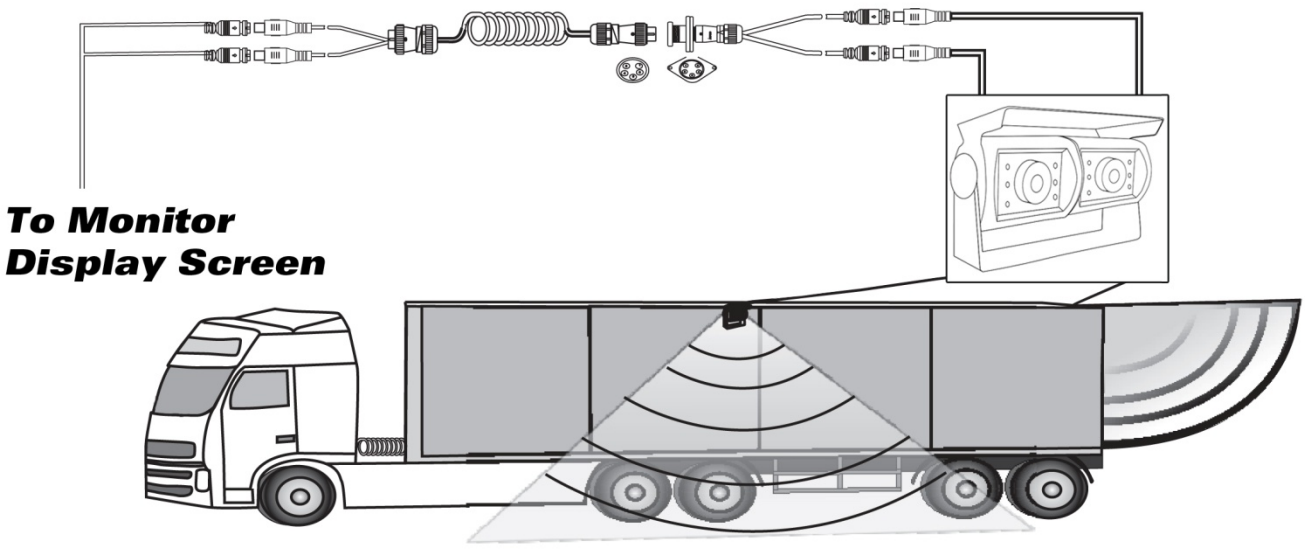

PLCMTR26

Dual Weatherproof Rearview Backup Camera, IR Night Vision, Waterproof, Commercial Grade, DC 12-24V for Bus, Truck, Trailer, Van

- 2-in-1 Dual Camera Housing Bracket
- CMD Weatherproof Rearview Camera System
- LED Lights with IR Night Vision Illumination
- Independent Lens Angle Adjustable Cameras
- IP Marine Grade IP-68 Rating, Water & Fog Resistance
- Versatile Mounting Options
- Low Lux Light Performance
- Image Sensor: Color CMD
- System: PAL/NTSC Auto Switching
- Video Output 1.0V pp-75 Ohm
- Effective Pixels: 580 x 540
- Resolution: 420 Lines
- Lens Angle: 170 Degree
- Min. Illumination: 0.2 Lux
- Auto Image Adjustment
- Designed for Car/Truck use with 12-24 Volt Systems
- Includes (2) 50 Foot (15 Meter) Connection Cable
- 4-Pin System Connectivity Jacks